

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 April 2004 (08.04.2004)


PCT

(10) International Publication Number
WO 2004/029107 A1

- (51) International Patent Classification⁷: C08F 10/00, (74) Common Representative: ATOFINA RESEARCH S.A.; Patent Department, Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).
- (21) International Application Number: PCT/EP2003/010713
- (22) International Filing Date: 24 September 2003 (24.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02079065.5 27 September 2002 (27.09.2002) EP
- (71) Applicant (for all designated States except US): ATOFINA RESEARCH [BE/BE]; Société Anonyme, Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): RAZAVI, Abbas [IR/BE]; Domaine de la Brisée 35, B-7000 Mons (BE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SILICON CONTAINING CYCLOPENTADIENYL RING FOR METALLOCENE CATALYST COMPONENTS

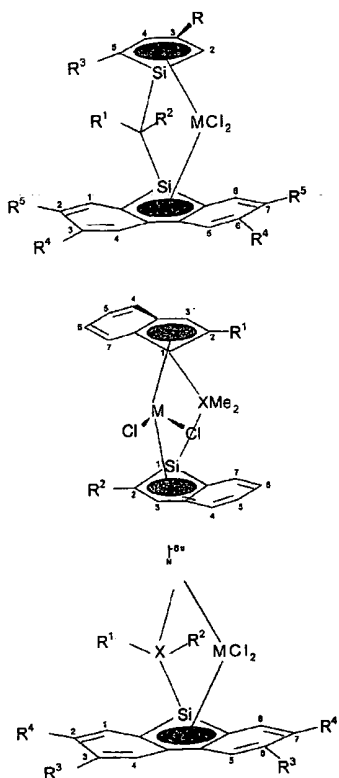

(57) Abstract: The present invention refers to a metallocene catalyst component for producing polyolefins according to formula (I) $R''_n(CpR_n)_2(CpR_n)_2M Q_{3-g}$ (I) or according to formula (II) $R''(CpR_n)_2MeXQ$ (II) wherein - each Cp is a substituted or unsubstituted cyclopentadienyl ring with the bridge-head position of at least one of the cyclopentadienyl rings being occupied by a silicon atom; - each R is the same or different and is hydrogen or a hydrocarbyl radical such as alkyl, alkenyl, aryl, alkylaryl or arylalkyl radical containing from 1 to 20 carbon atoms or two carbon atoms are joined together to form a C4-C6 ring; - R'' is a structural bridge between two Cp rings; - M is a group IIIB, IVB, VB or VIB metal; - Q is a hydrocarbyl radical such as aryl, alkyl, alkenyl, alkylaryl or arylalkyl radical having from 1 to 20 carbon atoms, a hydrocarboxy radical having from 1 to 20 carbon atoms or a halogen and can be the same or different from each other; - s is 0 or 1, g is 0, 1 or 2 and s is 0 when g is 0, n is 4 when s is 1 and n is 5 when s is 0; - X is an hetero atom ligand with one or two lone pair electrons and selected from the group VA or VIA, substituted or unsubstituted. Said metallocene catalyst component is used in a catalyst system for preparing polyolefins with desired properties.

WO 2004/029107 A1

WO 2004/029107 A1



Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

3/PT5

SILICON CONTAINING CYCLOPENTADIENYL RING FOR METALLOCENE
CATALYST COMPONENTS.

The present invention relates to a catalyst component and a catalyst system for use in the preparation of polyolefins, especially isotactic or syndiotactic polyolefins. The invention further relates to a process for the polymerisation of olefins using the catalyst component in a catalyst system.


In order to improve the properties of resins, bridged metallocene catalyst systems were developed. They are disclosed for example in PCT application WO91/03500. Typical bridged metallocene components are ethylene bis indenyl zirconium dichloride or ethylene bis tetrahydroindenyl zirconium dichloride, or they comprise substituted cyclopentadienyl such as disclosed in US-A-4,892,851. In these metallocene components, the bridge and the substituents' size and position were selected with a view to controlling the stereochemistry of polypropylene.

Resins produced with these improved metallocene catalysts components display improved mechanical properties because of their high molecular weight. In addition they have improved processing capabilities because of the presence of long chain branches. There is however room for improvement.

In addition, these catalyst components are generally unstable at high temperature thereby placing an upper limit on the temperature that can be employed in a polymerisation reaction. The catalyst component decomposes if the polymerisation temperature is too high.

Recent work has studied the behaviour of catalyst systems comprising carbon-containing ligands having heteroatoms in their structure. US-A-6,114,481 for example discloses compounds in which an organometallic complex is formed

from a group IV metal and a ketimide ligand. These types of compounds have been found useful in the preparation of olefin co-polymers having high molecular weight and very low density. Ketimide metal complexes have the general formula




wherein M is the metal atom and R¹ and R² are substituents.

US-A-6,051,667 discloses metallocene catalyst component comprising a phospholyl ligand. The metallocene components comprise two cyclopentadiene-type ligands, one of which being a phospholyl ligand, joined to each other by a metalloid-containing group. The bridging group is attached to the phospholyl ligand at the carbon atom adjacent to the phosphorous atom. These catalyst components are useful in the polymerisation of polymer comprising ethylene and propylene and more particularly linear low density polyethylene (LLDPE).

These catalyst systems can further be improved and more particularly, there is a need to prepare catalyst systems capable of producing macro chains having new polymeric properties.

This invention discloses the use of silicon containing cyclopentadienyl rings to prepare bridged or unbridged structures comprising cyclopentadienyl, fluorenyl, or indenyl components, substituted or unsubstituted, for the preparation of metallocene catalyst components.

The metallocene components of the present invention have a structure according to the formula:



wherein

- each Cp is a substituted or unsubstituted cyclopentadienyl ring with the bridge-head position of at least one of the cyclopentadienyl rings being occupied by a silicon atom;

- each R is the same or different and is hydrogen or a hydrocarbyl radical such as alkyl, alkenyl, aryl, alkylaryl or arylalkyl radical containing from 1 to 20 carbon atoms or two carbon atoms are joined together to form a C4-C6 ring;
- R" is a structural bridge between two Cp rings;
- M is a group IIIB, IVB, VB or VIB metal;
- Q is a hydrocarbyl radical such as aryl, alkyl, alkenyl, alkylaryl or arylalkyl radical having from 1 to 20 carbon atoms, a hydrocarboxy radical having from 1 to 20 carbon atoms or a halogen and can be the same or different from each other;
- g is 1 or 2 and n is an integer from 0 to 4.

In the prior art, the silicon atom was placed in the bridge of the metallocene catalyst component whereas in the present invention, it is placed in the cyclopentadienyl ring and replaces the carbon atom located at the bridge-head position in the cyclopentadienyl ring. The silicon atom is larger and has a larger number of electrons than the carbon atom. There are therefore more possibilities to vary the angle of aperture and the electronic character of the metallocene catalyst component with a silicon atom present in the cyclopentadienyl ring than with a carbon atom.

By substituted, it is meant that any of the positions on the cyclopentadienyl derivative may comprise a substituent in place of a hydrogen atom. This may be either within the five-membered cyclopentadienyl ring or, if the ligand is for example an indenyl, a tetrahydroindenyl or a fluorenyl, this may be on a carbon atom in the ring system outside of the five-membered ring.

Each catalyst component comprises two or more cyclopentadienyl derivatives that may be the same or different.

The particular cyclopentadienyl ligands on the metallocene catalyst lead to the advantage of the present invention.

In the present invention, the type of cyclopentadienyl derivative is not especially limited, provided that the derivative comprises at least one five-membered

cyclopentadienyl-type ring wherein the bridgehead position is occupied by a silicon atom. Thus, in preferred embodiments of the present invention, the Cp's may be independently selected from cyclopentadienyl-type groups, indenyl-type groups and fluorenyl-type groups. In the present disclosure, cyclopentadienyl-type group is meant to be a single substituted or unsubstituted cyclopentadienyl ring system and not a fused ring system such as indenyl or fluorenyl systems.

The type of bridge present between the ligands in the present catalyst component is not particularly limited. Typically R" comprises an alkylidene group having from 1 to 20 carbon atoms, a germanium group (e.g. a dialkyl germanium group), a silicon group (e.g. a dialkyl silicon group), a siloxane group (e.g. a dialkyl siloxane group), an alkyl phosphine group or an amine group. Preferably, the substituent on the bridge comprises a hydrocarbyl radical having at least one carbon, such as a substituted or unsubstituted ethylenyl radical, for example $-\text{CH}_2-\text{CH}_2-$ (Et). Most preferably R" is Et or Me_2Si .

The metal M in the metallocene component is preferably a metal from group IIIB, IVB, VB or VIB of the periodic table. Typically, M is Ti, Zr, Hf or V. Preferably, it is Ti or Zr and most preferably, it is Zr.

Q is preferably a halogen and most preferably it is Cl.

The substituent or substituents present on the ligands are not particularly limited. If there is more than one substituent, they can be the same or different. Typically, they are independently selected from an hydrocarbyl group having from 1 to 20 carbon atoms. Amongst the preferred substituents, one can cite methyl (Me) groups, phenyl (Ph), benzyl (Bz), naphthyl (Naph), indenyl (Ind), benzendyl (BzInd), as well as Et, n-propyl (n-Pr), iso-propyl (i-Pr), n-butyl (n-Bu), tert-butyl (t-Bu), silane derivatives (e.g. Me_3Si), alkoxy preferably given by the formula R-O where R is an alkyl having from 1 to 20 carbon atoms, cycloalkyl and halogen. Preferably there are at most two substituents on each Cp ring.

The position of the substituent or substituents on the ligands is not particularly limited. The ligands may thus have any substitution pattern including unsubstituted or fully substituted. However, when Cp is a cyclopentadienyl-type group, the substituents are preferably in the 3- and/or 5- positions or in the 2- and/or 4- positions. When Cp is a fluorenyl-type group, the substituents are preferably in the 3- and/or 6- positions or in the 2- and/or 7- positions. When Cp is an indenyl-type group, the substituents are preferably in the 2- and/or 4- positions.

In another embodiment according to the present invention, the metallocene catalyst component may be described by the formula




wherein R'', Cp, R_n, Me and Q have already been defined and wherein X is an hetero atom ligand with one or two lone pair electrons and selected from the group VA or VIA. Preferably, X is nitrogen, phosphorus oxygen or sulfur and it can be substituted or unsubstituted.


The catalyst system of the present invention is not limited provided that it comprises at least one metallocene catalyst component as defined above. The system may comprise further catalyst components if necessary, such as other metallocene catalyst components according to the present invention or other catalysts.

The catalyst system of the present invention comprises, in addition to the above catalyst component, one or more activating agents having an ionising action and capable of activating the metallocene catalyst component. Typically, the activating agent comprises an aluminium- or a boron-containing compound. Suitable aluminium-containing activating agents comprise an alumoxane, an alkyl aluminium compound and/or a Lewis acid.

Preferably, alumoxane is used as an activating agent. The alumoxanes that can be used in the present invention are well known and comprise oligomeric and/or cyclic alkyl alumoxanes represented by the formula




for oligomeric, linear alumoxanes,
and



for oligomeric, cyclic alumoxanes,
wherein n is 1-40, preferably 10-20, m is 3-40, preferably 3-20 and R is a C₁-C₈ alkyl group and preferably methyl. Generally, in the preparation of alumoxanes from, for example, aluminium trimethyl and water, a mixture of linear and cyclic compounds is obtained.

Methylalumoxane is preferably used.

Suitable boron-containing compounds activating agents may comprise triphenylcarbenium boronate, such as tetrakis-pentafluorophenyl-borato-triphenylcarbenium as described in EP-A-0,427,696



or those of the general formula below as described in EP-A-0,277004 (page 6, line 30 to page 7, line 7):



Additionally, activating agents such as hydroxy isobutyl aluminoxane and metal aluminoxinates can be used in the present invention. These are disclosed for example in Watanabi et al. (Watanabi M, McMahon N.C., Harlan J.C., Barron A.R., in "Reaction of trimethylaluminum with [(^tBu)Al (μ₃-O)]₆: hybrid tert-

butylmethyalumoxanes as cocatalysts for olefin polymerisation." In Organometallics, 20, 460-467, 2001.) or in Francis et al. (Francis J.A., Bott S.G. and Barron A.R., in "Are intramolecularly stabilised compounds of aluminium suitable structural models of the S_N2 transition state? Molecular structure of $[(^t\text{Bu})_2\text{Al}(\mu\text{-OC}_6\text{H}_4\text{-2-OMe})]_2$." In Polyhedron, 18, 2211-2218, 1999.) or in Francis et al. (Francis J.A., Bott S.G. and Barron A.R., in "Hydroalumination of $\text{H}_2\text{C}=\text{CHCH}_2\text{SMe}$: Synthesis and molecular structure of $(^t\text{Bu})_2\text{Al}(\text{CH}_2\text{CH}_2\text{CH}_2\text{SMe})$." In Main Group Chemistry, 3, 53-57, 1999.). With these two new classes of activating agents, it is preferred that at least one Q, in the general formulae (I) and (II) for the metallocene catalyst component, be an alkyl.

When alumoxane is not used as activating agent, one or more aluminiumalkyl represented by the formula AlR_x are used wherein each R is the same or different and is selected from halides or from alkoxy or alkyl groups having from 1 to 12 carbon atoms and x is from 1 to 3. Especially suitable aluminiumalkyl are trialkylaluminium, the most preferred being triisobutylaluminium (TIBAL).

Optionally, a cocatalyst such as an aluminiumalkyl, can be used in addition to alumoxane.

The catalyst system may be employed in a solution polymerisation process, which is homogeneous, or a slurry process, which is heterogeneous. In a solution process, typical solvents include hydrocarbons having from 4 to 7 carbon atoms such as heptane, toluene or cyclohexane. In a slurry process it is necessary to immobilise the catalyst system on an inert support, particularly a porous solid support such as talc, inorganic oxides and resinous support materials such as polyolefins. Preferably, the support material is an inorganic oxide in its finely divided form.

Suitable inorganic oxide materials that may be employed in accordance with this invention include group IIA, IIIA, IVA, or IVB metal oxides such as silica, alumina and mixtures thereof. Other inorganic oxides that may be employed either alone or in combination with the silica, or alumina are for example magnesia, titania or zirconia.

Other suitable support materials comprise for example finely divided functionalised polyolefins such as finely divided polyethylene.

Preferably, the support is a silica support having a specific surface area of from 200 to 700 m²/g and a pore volume of from 0.5 to 3 ml/g.

The amount of activating agent and metallocene component usefully employed in the preparation of the solid supported catalyst system can vary over a wide range. If alumoxane is used as activating agent, the aluminium to transition metal ratio is preferably in the range of from 1:1 to 100:1, more preferably in the range of from 5:1 to 50:1.


The order of addition of the catalyst and alumoxane to the support material can vary. In accordance with a preferred embodiment of the present invention, alumoxane dissolved in a suitable inert hydrocarbon solvent is added to the support material slurried in the same or another suitable hydrocarbon liquid and thereafter the catalyst component is added to the slurry.

Preferred solvents include mineral oils and the various hydrocarbons which are liquid at reaction temperature and which do not react with the individual ingredients. Illustrative examples of the useful solvents include the alkanes such as pentane, isopentane, hexane, heptane, octane and nonane; cycloalkanes such as cyclopentane, cyclohexane, and aromatics such as benzene, toluene, ethylbenzene and diethylbenzene.


Preferably, the support material is slurried in toluene and the catalyst component and alumoxane are dissolved in toluene prior to addition to the support material.

The present invention further discloses a process for preparing a catalyst system that comprises the steps of:

A. providing a metallocene catalyst component of the general formula



or



wherein

- each Cp is a substituted or unsubstituted cyclopentadienyl ring with the bridge-head position of at least one of the cyclopentadienyl rings being occupied by a silicon atom;
- each R is the same or different and is hydrogen or a hydrocarbyl radical such as alkyl, alkenyl, aryl, alkylaryl or arylalkyl radical containing from 1 to 20 carbon atoms or two carbon atoms are joined together to form a C4-C6 ring;
- R'' is a structural bridge between two Cp rings;
- M is a group IIIB, IVB, VB or VIB metal;
- Q is a hydrocarbyl radical such as aryl, alkyl, alkenyl, alkylaryl or arylalkyl radical having from 1 to 20 carbon atoms, a hydrocarboxy radical having from 1 to 20 carbon atoms or a halogen and can be the same or different from each other;
- s is 0 or 1, g is 0, 1 or 2 and s is 0 when g is 0, n is 4 when s is 1 and n is 5 when s is 0;
- X is an heteroatom ligand with one or two lone pair electrons and selected from group VA or VIA, substituted or unsubstituted.

- B. activating the metallocene component with an activating agent having an ionising action;
- C. optionally immobilising the catalyst system on an inorganic support.

These metallocene components can be used to produce highly performing systems in the catalytic production of polyethylene, isotactic or syndiotactic polypropylene, polystyrene, homo- and co-polymers of alpha-olefins. They can be used to produce stereo- or non-stereo-regular polymers or macro chains with new polymeric properties. The metallocene catalyst system is selected according to the desired polymer properties. For example, if a syndiotactic polypropylene is desired, the metallocene catalyst component preferably has bilateral Cs symmetry such as for

example in the fluorenyl-type group. If an isotactic polypropylene is prepared, the metallocene catalyst component preferably has C2 symmetry such as for example in the indenyl-type group.

The present invention also discloses a process for the preparation of polyolefins including the steps of:

A. selecting a catalyst system comprising:

1. a metallocene catalyst component of the general formula



or



wherein

- each Cp is a substituted or unsubstituted cyclopentadienyl ring with the bridge-head position of at least one of the cyclopentadienyl rings being occupied by a silicon atom;
 - each R is the same or different and is hydrogen or a hydrocarbyl radical such as alkyl, alkenyl, aryl, alkylaryl or arylalkyl radical containing from 1 to 20 carbon atoms or two carbon atoms are joined together to form a C4-C6 ring;
 - R'' is a structural bridge between two Cp rings;
 - M is a group IIIB, IVB, VB or VIB metal;
 - Q is a hydrocarbyl radical such as aryl, alkyl, alkenyl, alkylaryl or arylalkyl radical having from 1 to 20 carbon atoms, a hydrocarboxy radical having from 1 to 20 carbon atoms or a halogen and can be the same or different from each other;
 - s is 0 or 1, g is 0, 1 or 2 and s is 0 when g is 0, n is 4 when s is 1 and n is 5 when s is 0,
 - X is an heteroatom ligand with one or two lone pair electrons and selected from the group VA or VIA, substituted or unsubstituted.
2. an activating agent having an ionising action;
 3. an optional inorganic support

- B. optionally providing a co-catalyst;
- C. introducing the catalyst system and optional co-catalyst into a polymerisation zone containing an olefin monomer and an optional co-monomer and maintaining the reaction zone under polymerisation conditions;
- D. extracting the desired polymer.

The conditions employed for polymerisation are not particularly limited, provided they are sufficient to effectively polymerise the particular monomer used as a starting material. Optionally pre-polymerisation can be carried out. Preferably, polymerisation takes place in the presence of hydrogen and an alkene co-monomer such as 1-butene or 1-hexene.

Examples.

The preparation and some uses of dianions of silapentadiene, silafluorene and silaindene are disclosed in Liu et al. (Liu Y., Stringfellow T.C., Ballweg D., Guzei I.A., West R., in "Structure and chemistry of 1-silafluorenyl dianion, its derivatives, and an organosilicon diradical dianion." J. Am. Chem. Soc., 124, 49, 2002.).

In the present invention, these dianions were used to prepare metallocene catalyst components by any method known in the art such as disclosed for example in EP-A-0,426,643 or in EP-A-0,619,325, or in EP-A-0,910591.

Examples of such metallocene catalyst components are disclosed in Figures 1 to 3.

Figure 1 represents a bridged cyclopentadienyl-fluorenyl structure wherein the carbon atom has been replaced by a silicon atom at the bridgehead position of both cyclopentadienyls.

Figure 2 represents a bridged bisindenyl structure wherein the carbon atom has been replaced by a silicon atom at the bridgehead position of one of the cyclopentadienyls.

Figure 3 represents a constrain geometry structure wherein the carbon atom has been replaced by a silicon atom at the bridgehead position of the fluorenyl.

To produce an active catalyst system, the metallocene catalyst component was reacted with methylalumoxane (30 wt% in toluene), under the usual conditions to give a solution of the corresponding cation and the anionic methylalumoxane oligomer.


Then the resulting solution comprising the metallocene cation and the anionic methylalumoxane oligomer was added to a support.

CLAIMS.

1. A metallocene catalyst component for producing polyolefins according to formula (I)



or according to formula (II)



wherein

- each Cp is a substituted or unsubstituted cyclopentadienyl ring with the bridge-head position of at least one of the cyclopentadienyl rings being occupied by a silicon atom;
- each R is the same or different and is hydrogen or a hydrocarbyl radical such as alkyl, alkenyl, aryl, alkylaryl or arylalkyl radical containing from 1 to 20 carbon atoms or two carbon atoms are joined together to form a C4-C6 ring;
- R'' is a structural bridge between two Cp rings;
- M is a group IIIB, IVB, VB or VIB metal;
- Q is a hydrocarbyl radical such as aryl, alkyl, alkenyl, alkylaryl or arylalkyl radical having from 1 to 20 carbon atoms, a hydrocarboxy radical having from 1 to 20 carbon atoms or a halogen and can be the same or different from each other;
- g is 1 or 2, n is an integer from 0 to 4,
- X is an hetero atom ligand with one or two lone pair electrons and selected from the group VA or VIA, substituted or unsubstituted.

2. The metallocene catalyst component of claim 1 or claim 2 wherein the number of substituents on each cyclopentadienyl is at most two.

3. The metallocene catalyst component of any one of claims 1 to 3 wherein the position of substituents is 3- and/or 5- for a cyclopentadienyl-type group, 3- and/or 6- for a fluorenyl-type group and 2- and/or 4- for an indenyl-type group.
4. The metallocene catalyst component of any one of claims 1 to 4 wherein the bridge is Et or Me₂Si.
5. The metallocene catalyst component of any one of claims 1 to 5 wherein the metal is zirconium or titanium.
6. The metallocene catalyst component of any one of claims 1 to 6 wherein Q is chlorine.
7. The metallocene catalyst component of any one of claims 1 to 6 wherein X is nitrogen, phosphorus, oxygen or sulfur.
8. A metallocene catalyst system comprising the metallocene catalyst component according to any one of the preceding claims and an activating agent having an ionising action.
9. The metallocene catalyst system of claim 8 wherein the activating agent is alumoxane.
10. The metallocene catalyst system of claim 9 wherein the alumoxane is methylalumoxane.
11. The metallocene catalyst system according to any one of claims 8 to 10 further comprising an inert inorganic support.
12. The metallocene catalyst system according to any one of claims 8 to 11 wherein the inorganic support is silica having a specific surface area of from 200 to 700 m²/g and a pore volume of from 0.5 to 3 ml/g.

13. A process for preparing the metallocene catalyst system of any one of claims 8 to 12 comprising the steps of:
- A. providing a metallocene catalyst component according to any one of claims 1 to 7
 - B. activating the metallocene component with an activating agent having an ionising action;
 - C. optionally immobilising the metallocene catalyst system on an inorganic support.
14. The process of claim 13 wherein the activating agent is an alumoxane.
15. A process for preparing polyolefins comprising the steps of:
- A. selecting a metallocene catalyst system according to any one of claims 8 to 12;
 - B. optionally providing a cocatalyst;
 - C. introducing the metallocene catalyst system and optional cocatalyst into a polymerisation zone containing an olefin monomer and an optional co-monomer and maintaining the reaction zone under polymerisation conditions;
 - D. extracting the desired polymer.
16. The process of claim 15 comprising the additional step of pre-polymerisation prior to polymerisation.
17. Use of the catalyst system according to any one of claims 8 to 12 to produce stereo-regular or non-stereo-regular polyolefins.
18. Use of the catalyst system according to any one of claims 5 to 12 to produce macro chains with desired polymeric properties.
19. Stereo-regular or non-stereo-regular polyolefins obtainable by the process of claim 15 or claim 16.

20. Macro chains with polymeric properties obtainable by the process of claim 15 or claim 16.

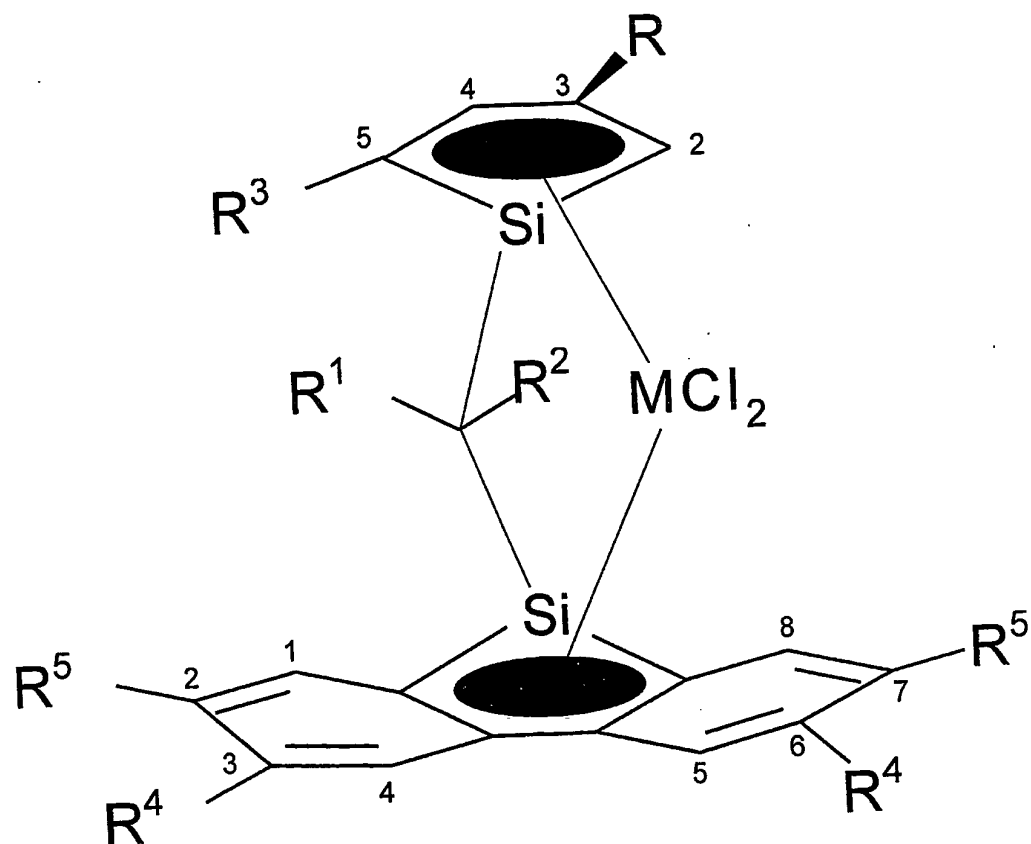


FIGURE 1.

2/3

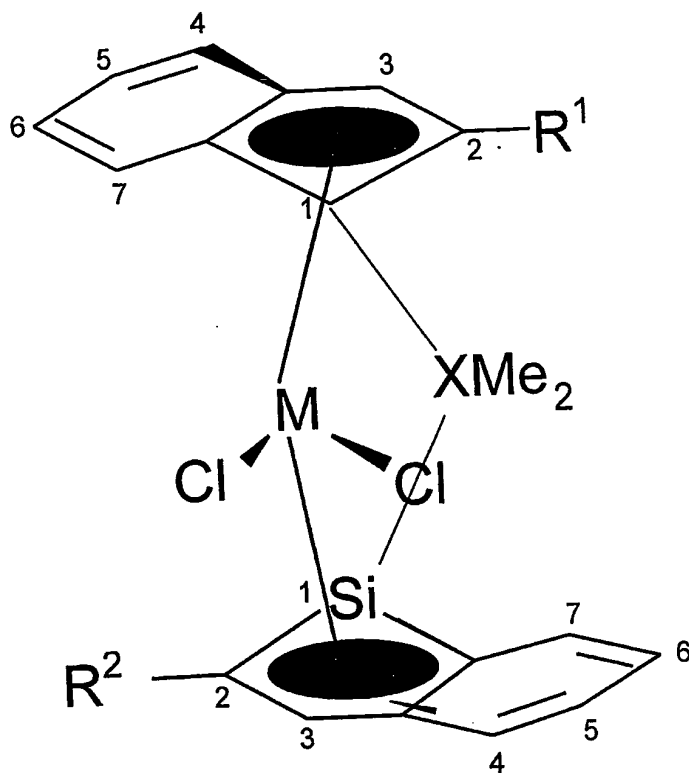


FIGURE 2.

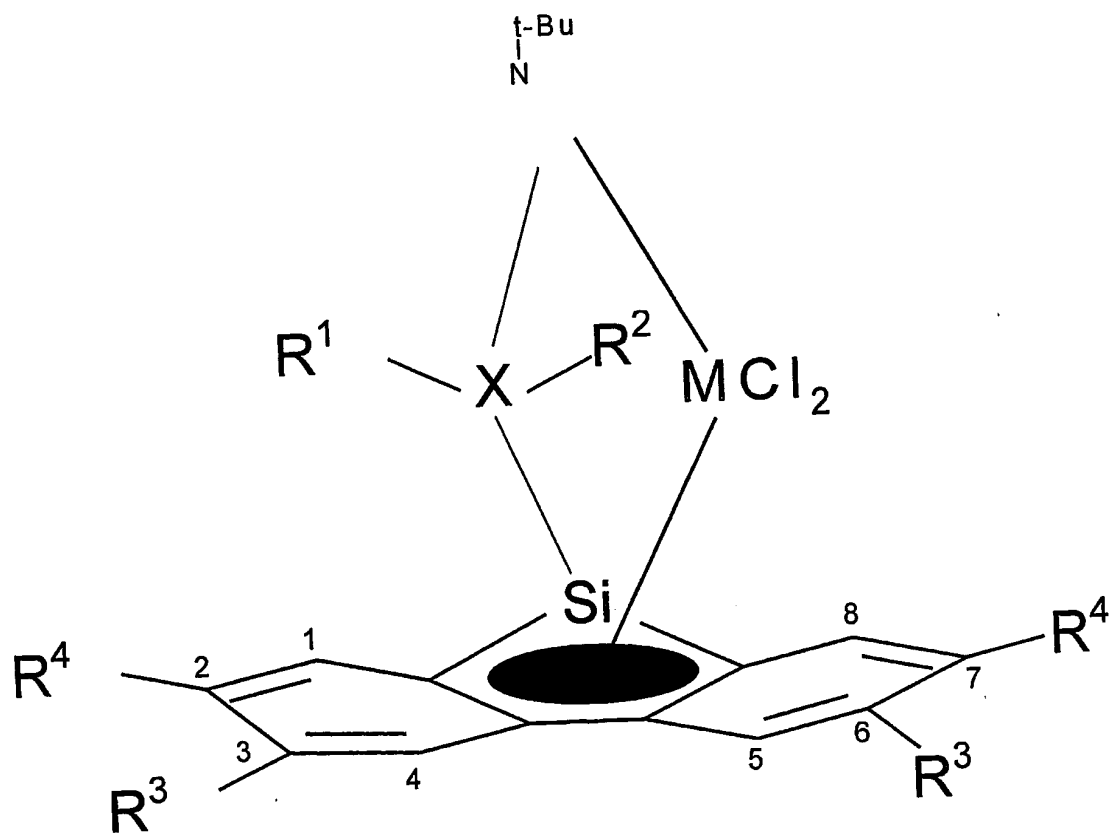


FIGURE 3.

INTERNATIONAL SEARCH REPORT

International Application No
EP 03/10713

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08F10/00 C08F4/642 C07F17/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C08F C07F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)
CHEM ABS Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 351 392 A (FINA TECHNOLOGY) 17 January 1990 (1990-01-17) page 6 -page 9; examples 1-33	1-20
X	EP 0 818 475 A (FINA RESEARCH) 14 January 1998 (1998-01-14) page 7 -page 9; examples 1-14; table 1	1-20
A	DYSARD, JEFFREY M. ET AL: "Synthesis and Reactivity of .eta.5-Silolyl, .eta.5-Germolyl, and .eta.5-Germole Dianion Complexes of Zirconium and Hafnium" JOURNAL OF THE AMERICAN CHEMICAL SOCIETY (2000), 122(13), 3097-3105 , XP001148239 page 3102; figure 3	1-20

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

19 January 2004

Date of mailing of the international search report

29/01/2004

Name and mailing address of the ISA

E. Jean Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Parry, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/10713

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>DYSARD, JEFFREY M. ET AL: ".eta.5-Silolyl and .eta.5-Germolyl Complexes of d0 Hafnium. Structural Characterization of an .eta.5-Silolyl Complex"</p> <p>JOURNAL OF THE AMERICAN CHEMICAL SOCIETY (1998), 120(32), 8245-8246 ,</p> <p>XP001148240</p> <p>see scheme 1</p> <p>page 8246</p>	1-20
A	<p>LIU, YUXIA ET AL: "Structure and Chemistry of 1-Silafluorenyl Dianion, Its Derivatives, and an Organosilicon Diradical Dianion"</p> <p>JOURNAL OF THE AMERICAN CHEMICAL SOCIETY (2002), 124(1), 49-57 ,</p> <p>XP001148238</p> <p>cited in the application</p> <p>page 52; examples 16-18</p>	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/10713

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0351392	A	17-01-1990	US 4892851 A 09-01-1990
			AT 200902 T 15-05-2001
			AU 610731 B2 23-05-1991
			AU 3660589 A 18-01-1990
			CA 1338600 C 17-09-1996
			CN 1040036 A ,B 28-02-1990
			CZ 8903655 A3 17-12-1997
			DD 290200 A5 23-05-1991
			DD 299651 A5 30-04-1992
			DE 68929293 D1 07-06-2001
			DE 68929293 T2 20-09-2001
			EP 0351392 A2 17-01-1990
			ES 2157194 T3 16-08-2001
			FI 893140 A ,B, 16-01-1990
			JP 2041303 A 09-02-1990
			JP 2851867 B2 27-01-1999
			KR 145313 B1 15-07-1998
			NO 892330 A ,B, 16-01-1990
			SK 365589 A3 12-06-2000
			RU 2077541 C1 20-04-1997
			RU 2017519 C1 15-08-1994
			US 5292838 A 08-03-1994
			US 5278265 A 11-01-1994
			US 5589556 A 31-12-1996
			US 5155080 A 13-10-1992
			US 5162278 A 10-11-1992
			US 5158920 A 27-10-1992
			US 5334677 A 02-08-1994
			US 5223468 A 29-06-1993
			US 5243002 A 07-09-1993
			US 5225500 A 06-07-1993
			US 5223467 A 29-06-1993
			US 5304523 A 19-04-1994
EP 0818475	A	14-01-1998	EP 0818475 A1 14-01-1998
			AT 199915 T 15-04-2001
			AU 3939897 A 09-02-1998
			BR 9710253 A 18-01-2000
			CA 2260891 A1 22-01-1998
			DE 69704356 D1 26-04-2001
			DE 69704356 T2 09-08-2001
			DK 910591 T3 11-06-2001
			WO 9802469 A1 22-01-1998
			EP 0910591 A1 28-04-1999
			ES 2156396 T3 16-06-2001
			GR 3036105 T3 28-09-2001
			JP 2000514488 T 31-10-2000
			KR 2000023614 A 25-04-2000
			NO 990073 A 08-01-1999
			US 6448349 B1 10-09-2002
			US 6630550 B1 07-10-2003